(51) International Patent Classification⁷: G06K 1/12, 11/18, G06F 3/033

(21) International Application Number: PCT/SE01/00608

(22) International Filing Date: 21 March 2001 (21.03.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0000949-8   21 March 2000 (21.03.2000)   SE

(71) Applicant (for all designated States except US): ANOTO AB [SE/SE]; c/o C Technologies, Scheelevägen 15, S-223 70 Lund (SE).

(72) Inventor; and
(75) Inventor/Applicant (for US only): WIEBE, Linus [SE/SE]; Grönegatan 8, S-222 24 Lund (SE).

(74) Agent: AWAPATENT AB; Box 45086, S-104 30 Stockholm (SE).

(81) Designated States (national): AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian

(54) Title: POSITION INFORMATION

_a_   _b_   _c_   _d_

52, 51, 54, 53, 56, 55, 57, 60, 59, 58
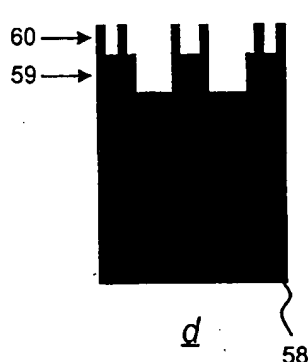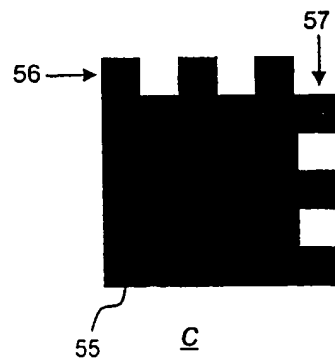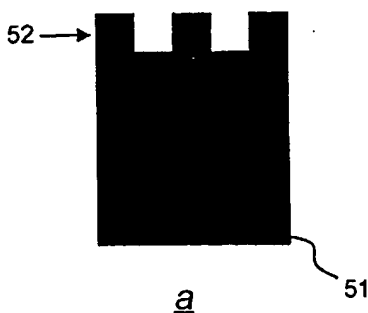
(57) Abstract: A product has a surface which is provided with a position-coding pattern (3) which codes a plurality of positions on the surface. The position-coding pattern comprises a plurality of symbols (4) each of which has at least two different values. Each position on the surface is coded with a plurality of symbols. Each symbol comprises a raster point (6) which is included in a raster which extends over the surface, and at least one marking (7), the location of which in relation to the raster point specifies the value of the symbol. The markings can comprise information which is represented at more than one spatial resolution level and which information can vary between different markings. The position-coding pattern can be used in different contexts for position determination, for example in digitizing handwriting.

WO 01/71643 A1

patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:
— *with international search report*

POSITION INFORMATION

TECHNICAL FIELD

The present invention relates to devices and methods relating to surfaces which are provided with a coding
5　pattern.

BACKGROUND

In many contexts, it is desirable to be able to determine an absolute position on a surface. One example is in the digitization of drawings. Another one is when it is
10　intended to produce an electronic version of hand-written information.

In these and other contexts in which position determination is carried out, it is often desirable to facilitate, for example, for a computer program in
15　cooperation with an input device to carry out calculations which are related to the position determination.

In US 5,852,434, a device for determining an absolute position is described. The device comprises a writing
20　surface which is provided with a position-coding pattern, with the aid of which X/Y coordinates can be determined, a detector which can detect the position-coding pattern and a processor which can determine, on the basis of the detected position-coding pattern, the position of the
25　detector in relation to the writing surface. The device makes it possible for a user to input handwritten and handdrawn information into a computer at the same time as the information is written/drawn on the writing surface.

A number of examples of position coding are given in US
30　5,852,434. The first example is symbols which are in each

case built up of three concentric circles. The outermost
circle represents the X coordinate and the middle one the
Y coordinate. The two outermost circles are furthermore
divided into 16 parts which specify different numbers

5   depending on whether they are filled in or not. This
entails that each pair of coordinates X, Y is coded with
a complex symbol having a special appearance.

In the second example in US 5,852,434, the coordinates at
every point on the writing surface are specified with the

10   aid of a bar code, a bar code for the X coordinate being
specified above a bar code for the Y coordinate.

A shortcoming of the prior art summarized above is thus
that it does not facilitate, for example, for a computer
program in cooperation with an input device to carry out

15   calculations which are related to the position
determination since only position information is
processed.

A further shortcoming related to the known pattern is
that it is built up of complex symbols, the information

20   content of which indicates the actual positions. The
smaller these symbols are made the more difficult it
becomes to produce the patterned writing surface and the
greater will be the risk of erroneous position
determinations, but the larger the symbols are made the

25   worse will be the position resolution.

Another shortcoming is that the detector must be
constructed so that it can register four symbols at the
same time so that it reliably gets at least one symbol in
its totality which is necessary for it to be possible to

30   carry out the position determination.

In Applicant's International Patent Application WO
00/73983, which was filed on 1 October 1999 and which was
not publicly available when the present application was
filed and therefore does not constitute prior art, a

35   position coding pattern is described. Moreover reference

3

is also made to PCT/SE00/01895 and WO 01/16691, the
contents of which are included by reference.

SUMMARY OF THE INVENTION

It is an object of the present invention to remedy the
5   abovementioned deficiencies of prior art completely or
partially.

This object is achieved by means of a product according
to claim 1, software according to claims 15 and 16 and a
device according to claims 17 and 18.

10 More specifically, the invention relates to a product
which has a surface which is provided with a coding
pattern which comprises symbols which have at least two
different values. The invention is characterized in that
each symbol comprises a raster point and at least one
15 marking, that the raster point is included in a raster
which extends over the surface; that the value of each
symbol is indicated by the location of said marking in
relation to a raster point and that at least one marking
comprises marking information.

20 In prior art, each position is coded with a complex
symbol, the complete information content of which is
needed for specifying position information. According to
the invention, instead, a symbol is used the value of
which is specified by the location of a marking in
25 relation to a raster point. There is thus one type of
symbol for each value. A device which will carry out the
position determination therefore only needs to detect the
occurrence of one marking. Moreover, a position-
determining device according to the invention can
30 distinguish between different markings and thereby
acquire further information related to, for example, the
position in question. This further marking information
can advantageously vary depending on the position which
is determined.

4

The design of the symbol according to the invention also
entails that a surface which is provided with a coding
pattern according to the invention becomes more
esthetically pleasing.

5   Furthermore, a large distance between the markings in
relation to the position-information density is made
possible, which has the result that the coding becomes
less sensitive to movement blur.

The symbols described above can be used for coding any
10   type of information but are advantageously used for
coding positions and position-related further information
via the markings of the symbols. As mentioned, in prior
art each position is coded with a single symbol which
therefore must be rather complex. According to the
15   invention, on the other hand, each position can be coded
with a plurality of symbols. Each individual symbol can
thus be made less complex and thus simpler to detect with
higher reliability.

According to the invention, the position information and
20   position-related information are separated in that the
markings of the symbols contain different types of
information depending on which spatial resolution is
taken into consideration. In a first spatial resolution
level, the markings of the symbols are only used for
25   specifying position information. By taking into
consideration further spatial resolution levels which are
higher than the first one, the further information can be
coded and retrieved from the markings. An obvious
advantage of this separation of information into
30   different spatial resolution levels is that, even if
reading the markings entails loss of detail information,
at least the information which has been stored with the
lowest spatial resolution, i.e. the existence of the
markings itself, can be utilized. This will also prove to
35   be advantageous when considering reading devices and

their capability of reading information of different
spatial resolution, as will be discussed further below.

In prior art, each position is coded with a symbol which
is "isolated" from symbols of the surrounding positions.
5   The position resolution is thus limited by the surface
occupied by the symbol of a position. The position-coding
pattern according to the invention can be built up in
corresponding manner, each position being coded by an
"isolated" group of symbols. In a preferred embodiment of
10 the invention, however, each symbol contributes to the
coding of more than one position. In this manner, a
"floating" transition between different positions is
obtained. In other words, each position is coded partly
by the same symbols as the adjoining positions. The
15 floating coding is advantageous since it makes it
possible to increase the position resolution.
Furthermore, it is possible to reduce the relationship
between, on the one hand, the number of symbols which a
position-determining device must register in order to be
20 able to carry out a position determination reliably and,
on the other hand, the number of symbols which code a
position.

In a preferred embodiment, each symbol contributes to the
coding of both a first and a second position coordinate.
25 Thus, different symbols are not needed for the different
coordinates, which makes the position code simpler and
the position resolution better. The coordinate system can
be suitably Cartesian but other types of coordinate
systems are also conceivable.

30 Furthermore, the value of each symbol can be
advantageously translatable into at least a first digit
which is used for coding the first coordinate, and at
least a second digit which is used for coding the second
coordinate, the symbols in the position-coding pattern
35 together representing a first position code for the first
coordinate and a second position code for the second

6

coordinate. The two coordinates can then be coded
independently of one another, which makes the coding
simpler when the coding is "floating". Preferably, the
value of the symbol is represented in a binary manner, a
5   first bit being used for the coding of a first coordinate
and a second bit for the coding of a second coordinate.

The position-coding pattern is advantageously based on a
first cyclic, preferably binary, number series which has
the characteristic that no sequence with a first
10   predetermined number of digits appears more than once in
the number series. Due to the fact that the position-
coding pattern is built up in this manner, it will
contain inherent information about the positions so that
the coordinates can be calculated according to
15   predetermined rules. This is advantageous in that it
means that the decoding of the position-coding pattern
can be implemented in an efficient manner in, for
example, software. Besides, it will be much simpler to
produce the position-coding pattern in this way compared
20   with trying to randomly generate an unambiguous position-
coding pattern of a floating type.

In one embodiment, the product can comprise a plurality
of writing surfaces each of which comprises the position-
coding pattern with the further marking information coded
25   in a number of markings. For example, the product can
consist of a notepad with a plurality of sheets, such as
maps, forms, blanks etc. The position-coding patterns
then differ for the various writing surfaces by the
sequence in the cyclic number series with which a
30   predetermined column or row begins. The "same" pattern
can thus be used for a plurality of writing surfaces
which can be separated or integrated with one another by
allowing, for example, the first column to begin at
different positions in the number series.

35   Considering the further marking information, this can be
seen as providing an extension of the cyclic number

7

series with the advantage of providing an even larger
available area which can be provided with a unique coding
pattern.

The position-coding pattern can be implemented with any
5   parameter whatever which can be used for producing
symbols of the above-mentioned type which can be detected
by a detector. The parameter can be electric or chemical
or of another type. However, the position-coding pattern
is preferably optically readable which makes it simpler
10   to apply it to the surface. The pattern should thus be
able to reflect or absorb light but the light does not
need to lie within the visible range.

The raster and/or the raster points can be implemented on
the surface. In a preferred embodiment, however, the
15   raster and the raster points are virtual. Thus, the
raster is not marked on the surface at all but only
constitutes an imaginary raster which forms the base of
the coding but which can be located on the basis of the
location of the markings.

20   The products described above can be any products whatever
which have a surface with a coding pattern. They can be
used for a large number of different applications. For
example, they can be used for continuously registering
the position of a pen which is conducted over the writing
25   surface where the further position-related marking
information, for example, contains direct information
about how the written text is to be reproduced, for
example on a computer screen. Further examples comprise a
map with a printed pattern according to the invention,
30   whereby, for example, the further information in the
markings can contain information relating, for example,
levels of elevation. They can also be used in determining
the position of a tool, an instrument or the like. They
can also be used as a mouse pad. A person skilled in the
35   art can think of many other applications.

8

According to a further aspect of the invention, it
relates to a computer program which is stored on a
storage medium which can be read by a computer and which
comprises instructions for causing the computer to decode
5   the position-coding pattern on a product according to any
one of claims 1-14.

According to yet another aspect of the invention, it
relates to a computer program for determining the
position of a partial surface on a surface, which is
10   provided with a position-coding pattern which comprises a
plurality of symbols, on the basis of an image of the
partial surface, each symbol comprising a raster point
and at least one marking, the computer program being
stored on a storage medium which can be read by a
15   computer and which comprises instructions for causing the
computer to locate a predetermined plurality of symbols
in the image, to determine the value of each of the said
predetermined plurality of symbols, to separate the
position-coding pattern in the image into a first
20   position code for a first coordinate and a second
position code for a second coordinate by translating the
value of each symbol into at least a first digit for the
first position code and at least a second digit for the
second position code, and to calculate the first
25   coordinate with the aid of the first position code and
the second coordinate with the aid of the second position
code. Moreover, the locating of at least one marking is
carried out, which comprises marking information, after
which this is interpreted.

30   The computer programs can be used together with prior-art
position-determining devices. They can be installed in a
separate computer to which images of the position-coding
pattern are sent, or in the actual device which registers
the position-coding pattern.

35   According to another aspect of the invention, it relates
to a device for position determination, comprising a

sensor for producing an image of a partial surface on a
surface and image-processing devices which are arranged
to decode a position-coding pattern on a product
according to any one of claims 1-14, the said surface
5   being a surface on the product, which surface is provided
with the position-coding pattern.

According to a further aspect of the invention, it
relates to a device for position determination comprising
a sensor for producing an image of a partial surface of a
10   plurality of partial surfaces on a surface, which is
provided with a position-coding pattern, and image-
processing means which are arranged to locate a
predetermined plurality of symbols in the image, where
each symbol comprises at least one marking, to determine
15   the value of each of said predetermined plurality of
symbols, to separate the position-coding pattern in the
image into a first position code for a first coordinate
for the partial surface and into a second position code
for a second coordinate for the partial surface by
20   translating the value of each symbol into at least a
first digit which is used for the first position code and
at least a second digit which is used for the second
position code, and to calculate the first coordinate with
the aid of the first position code and the second
25   coordinate with the aid of the second position code.
Moreover, the location of at least one marking is carried
out, which comprises marking information, after which
this is interpreted.

The capability of interpreting the further information at
30   different spatial resolutions will prove very advantage-
ous in a commercial sense. Devices for interpreting the
position information and further information of any
spatial resolution are envisaged, but also devices
capable of interpreting only position information and
35   further information at only one other spatial resolution
(or even no other spatial resolution than that of the

position information). Such separation of devices into different levels of capability may be utilized commercially in that several generations of devices may be developed, each being capable of interpreting further
5   information at further spatial resolutions. Backward compatibility will be inherent in that the capability for early generation devices capable of interpreting information at, e.g., one or two spatial resolutions will also be able to interpret the information of the first
10 one or two spatial resolutions from symbols having information at three or more spatial resolutions.

Other advantages of the device are apparent from the above discussion of the position-coding pattern.

Due to the fact that the image-processing means in the
15 device are arranged to determine the position in a "rule-based" manner, the device does not require a large amount of storage capacity, which is an advantage with respect to the manufacturing costs of the device and the possibility of producing a stand-alone unit.

20 The image-processing means advantageously consist of a suitably programmed processor.

The device can be implemented as an independent unit. As an alternative, the sensor can be located in a first housing whilst the image-processing means are located in
25 another housing, e.g. a personal computer to which the images registered by the sensor are transferred.

One general advantage of the present invention is the fact that a number of different spatial resolution levels can be used. Reading devices such as reading pens can be
30 provided with different capacity for reading and decoding position information and marking information. For example, a simple and inexpensive reader can be produced for simply reading the pattern at the lowest spatial resolution level whilst a more advanced and more

11

expensive reader can be produced for reading information
at a number of spatial resolution levels.

Further objectives, features and advantages of the
invention will become apparent from the following
5   detailed description of embodiments of the invention with
reference to the drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 schematically shows an embodiment of a product
according to the present invention which is provided with
10   a position-coding pattern.

Figures 2a-2d schematically show how the symbols can be
configured in an embodiment of the invention.

Figure 3 schematically shows an example of 4x4 symbols
which are used for coding a position.

15   Figure 4 schematically shows a device according to the
present invention which can be used for position
determination.

Figures 5a-5d show examples of symbols with markings
which contain further binary-coded information at a
20   number of spatial resolution levels.

PREFERRED EMBODIMENTS

Figure 1 shows a part of a product in the form of a sheet
of paper 1 which on its surface 2 is provided with an
optically readable position-coding pattern 3 which
25   enables position determination to be performed. The
position-coding pattern consists of symbols 4 which are
systematically arranged over the surface 2 so that it has
a "patterned" appearance. The symbols comprise markings
which, for the sake of clarity, are round in Figure 1. In
30   connection with Figure 5, a number of other
configurations of markings will be shown below in detail
in order to illustrate how further information can be
represented at a higher spatial resolution level.

12

The sheet has an x coordinate axis and a y coordinate
axis. In this case, position determination can be carried
out on the surface of the whole product. In other cases,
the surface allowing position determination may consist

5   of a smaller part of the product. For example, the sheet
of paper can be used for producing an electronic
representation of information which is written or drawn
on the surface. The electronic representation can be
produced by continuously determining, while writing on

10 the surface with a pen, the position of the pen on the
sheet of paper by reading the position-coding pattern.

The position-coding pattern comprises a virtual raster
which thus is neither visible to the human eye nor can be
detected directly by a device which is to determine

15 positions on the surface, and a plurality of symbols 4
each being able to assume one of four values "1" - "4" as
will be described in the text which follows. In this
context, it should be pointed out that the position-
coding pattern in Figure 1 has been greatly enlarged for

20. the sake of clarity. It is also shown only on a part of
the sheet of paper.

The position-coding pattern is arranged in such a manner
that the position of a partial surface on the writing
surface is coded by the symbols on this partial surface.

25 A first and a second partial surface 5a, 5b are shown by
dashed lines in figure 1. The part of the position-coding
pattern (in this case 4 x 4 symbols) which is located on
the first partial surface 5a codes a first position, and
the part of the position-coding pattern which is located

30 on the second partial surface 5b codes a second position.
The position-coding pattern is thus partially common to
the adjoining first and second positions. Such a
position-coding pattern is designated as "floating" in
this application.

35 Figures 2a-d show an embodiment of a symbol which can be
used in the position-coding pattern according to the

13

invention. The symbol comprises a virtual raster point 6
which is represented by the intersection between the
raster lines, and a marking 7 which has the form of a
dot. The value of the symbol depends on where the marking
5   is located. In the example in Figure 2, there are four
possible locations, one on each of the raster lines
extending from the raster points. The displacement from
the raster point is equal for all values. In the text
which follows, the symbol has the value 1 in Figure 2a,
10 the value 2 in Figure 2b, the value 3 in Figure 2c and
the value 4 in Figure 2d. Expressed in other words, there
are four different types of symbol.

Each symbol can thus represent four values "1-4". This
means that the position-coding pattern can be divided
15 into a first position code for the x coordinate and a
second position code for the y coordinate. The dividing
is done in accordance with the following:

Symbol value	x code	y code
20 1	1	1
2	0	1
3	1	0
4	0	0

25 Thus, the value of each symbol is translated into a first
digit, in this case bit, for the x code and a second
digit, in this case bit, for the y code. In this manner,
two completely independent bit patterns are obtained. The
patterns can be combined into a common pattern which is
30 coded graphically with the aid of a plurality of symbols
according to Figure 2.

Each position is coded with the aid of a plurality of
symbols. In this example, 4x4 symbols are used for coding

14

a position in two dimensions, i.e. an x coordinate and a y coordinate.

The position code is built up with the aid of a number series of ones and zeroes which have the characteristic

5   that no sequence of four bits occurs more than once in the series. The number series is cyclic, which means that the characteristic also applies if the end of the series is coupled together with its beginning. Thus, a sequence of four bits always has an unambiguously determined

10   position in the number series.

The series can be maximally 16 bits long if it is to have the characteristic for sequences of four bits described above. In this example, however, only a 7-bit-long series according to the following is used:

15   "0 0 0 1 0 1 0"

This series contains seven unique sequences of four bits which code a position in the series according to the following:

20   Position in the series   Sequence

      0   0001

      1   0010

      2   0101

      3   1010

25   4   0100

      5   1000

      6   0000

For coding the x coordinate, the number series is written

30   sequentially in columns over the entire surface that is to be coded. The coding is based on the difference or position displacement between numbers in adjoining

15

columns. The magnitude of the difference is determined by
the position in the number series at which the column is
allowed to begin (i.e. with which sequence). More
specifically, if one takes the difference modulo 7

5   between, on the one hand, a number which is coded by a
four-bit sequence in a first column and which thus can
have the value (position) 0-6, and, on the other hand, a
corresponding number (i.e. a sequence on the same
"level") in an adjoining column, the result will be the

10   same independently of where along the two columns the
comparison is made. Using the difference between two
columns, an x coordinate can thus be coded which is
constant for all y coordinates.

Since each position on the surface is coded with 4x4

15   symbols in this example, three differences (having the
value 0-6) are available according to the above for
coding the x coordinate. The coding is then carried out
in such a manner that of the three differences, one will
always have the value 1 or 2 and the other two will have

20   the values in the interval 3-6. Thus, no differences will
be zero in the x code. In other words, the x code is
constructed in such a manner that the differences will be
as follows:

(3-6) (3-6) (1-2) (3-6) (3-6) (1-2) (3-6) (3-6) (1-2)...

25   Each x coordinate is thus coded with two numbers between
3 and 6 and a subsequent numbers which is 1 or 2. If 3 is
subtracted from the high numbers and 1 from the low one,
a number in mixed base will be obtained, which directly
provides a position in the x direction from which the x

30   coordinate can then be determined directly as shown in
the example below.

Using the principle described above, it is thus possible
to code x coordinates 0, 1, 2 ... with the aid of numbers
which represent three differences. These differences are

35   coded with a bit pattern which is based on the above

16

number series. Finally, the bit pattern can be coded
graphically with the aid of the symbols in Figure 2.

In many cases, when reading 4x4 symbols it will not be
possible to get a complete number which codes the x

5   coordinate but parts of two numbers. Since the least
significant part of the numbers is always 1 or 2,
however, a complete number can be reconstructed in a
simple manner.

The y coordinates are coded in accordance with the same
10   principle as is used for the x coordinates. The cyclic
number series is written repeatedly in horizontal rows
over the surface which is to be position-coded. Exactly
as in the case of the x coordinates, the rows are allowed
to begin at different positions, i.e. with different
15   sequences, in the number series. However, it is not
differences which are used for the y coordinates but the
coordinates are coded with numbers which are based on the
starting position of the number series in each row. When
the x coordinate for 4x4 symbols has been determined, it
20   is, in fact, possible to determine the starting positions
in the number series for the rows which are included in
the y code in the 4x4 symbols. In the y code, the most
significant digit is determined by allowing this to be
the only one that has a value in a specific interval. In
25   this example, one allows one row of four to begin at
position 0-1 in the number series to indicate that this
row relates to the least significant digit in a y
coordinate, and the other three begin at position 2-6. In
the y direction, there is thus a number series as
30   follows:

(2-6) (2-6) (2-6) (0-1) (2-6) (2-6) (2-6) (0-1) (2-6)...

Each y coordinate is thus coded with three numbers
between 2 and 6 and a subsequent number between 0 and 1.

If 0 is subtracted from the low number and 2 from the
35   high ones, one obtains, in the same manner as for the x

direction, a position in the y direction in mixed base, from which the y coordinate can be determined directly.

With the above method, it is possible to code 4 x 4 x 2 = 32 positions in the x direction. Each such position

5 corresponds to three differences giving 3 x 32 = 96 positions. Furthermore, it is possible to code 5 x 5 x 5 x 2 = 250 positions in the y direction. Each such position corresponds to four rows giving 4 x 250 = 1000 positions. Together, it is thus possible to code 96000

10 positions. Since the x coding is based on differences it is, however, possible to select the position at which the first number series begins. Taking into consideration that this first number series can begin at seven different positions, it is possible to code 7 x 96000 =

15 672000 positions. The starting position of the first number series in the first column can be calculated when the x coordinate has been determined. The above-mentioned seven different starting positions of the first series can code different sheets or writing surfaces on a

20 product.

To further illustrate the invention according to this embodiment, a specific example follows here which is based on the embodiment of the position code described.

Figure 3 shows an example of an image with 4x4 symbols

25 which are read by a device for position determination.

These 4x4 symbols have the following values:

4 4 4 2

3 2 3 4

4 4 2 4

30 1 3 2 4

These values represent the following binary x and y codes:

x code: y code:

18

```
0 0 0 0              0 0 0 1

1 0 1 0              0 1 0 0

0 0 0 0              0 0 1 0

1 1 0 0              1 0 1 0
```

5   The vertical x sequences code the following positions in
     the number series: 2 0 4 6. The differences between the
     columns will be -2 4 2, which modulo 7 gives: 5 4 2
     which, in mixed base, codes position (5-3) x 8 + (4-3) x
     2 + (2-1) = 16 + 2 + 1 = 19. Since the first coded x

10   position is position 0, the difference which lies in the
     interval 1-2 and which appears in the 4x4 symbols is the
     20th such difference. Since furthermore there are a total
     of three columns for each such difference and there is a
     start column, the vertical sequence farthest to the right

15   in the 4x4 x code belongs to the 61st column in the x
     code (3 x 20 + 1 = 61) and that farthest to the left
     belongs to the 58th.

     The horizontal y sequences code the positions 0 4 1 3 in
     the number series. Since these series begin in the 58th

20   column, the starting position of the rows are these
     numbers minus 57 modulo 7 providing the starting
     positions 6 3 0 2. Translated into digits in the mixed
     base, this becomes 6-2, 3-2, 0-0, 2-2 = 4 1 0 0 where the
     third digit is the least significant digit in the number

25   in question. The fourth digit is then the most
     significant digit in the next number. In this case, it
     must be the same as in the number in question. (The
     exception is when the number in question consists of the
     highest possible digits in all positions. It is then

30   apparent that the beginning of the next number is one
     greater than the beginning of the number in question).

     The position of the four-digit number becomes 0x50 + 4x10
     + 1x2 + 0x1 = 42 in the mixed base.

     The third row in the y code is thus the 43rd which has

35   the starting position 0 or 1, and since there are four

19

rows in total in each such row, the third row is number
43x4=172.

Thus, in this example, the position of the topmost left
corner for the 4x4 symbol group is (58,170).

5   Since the x sequences in the 4x4 group begin in row 170,
the x columns of the entire pattern begin at positions
((2 0 4 6) - 169) mod 7 = 1 6 3 5 of the number series.
Between the last starting position (5) and the first
starting position, the numbers 0-19 are coded in mixed
10   base and by adding together the representations for
numbers 0-19 in mixed base, the total difference between
these columns is obtained. A primitive algorithm for
doing this is to generate these twenty numbers and
directly add together their digits. The sum obtained is
15   called s. The sheet or writing surface is then given by
(5-s) modulo 7.

In the example above, an embodiment has been described in
which each position is coded with 4x4 symbols and a
number series with 7 bits is used. Naturally, this is
20   only an example. Positions can be coded with more of
fewer symbols. The number of symbols does not need to be
the same in both directions. The number series can have
different length and does not need to be binary but may
be built up on another base. Different number series can
25   be used for coding in the x direction and coding in the y
direction. The symbols can have different numbers of
values.

In the example above, furthermore, the marking is a dot.
Naturally, it can have a different appearance. For
30   example, it may consist of a line which begins in the
virtual raster point and extends from that to a
predetermined position.

In the example above, the symbols are used within a
square partial surface for coding a position. The partial
35   surface can have another form, for example hexagonal.

Neither do the symbols need to be arranged in rows and
columns at an angle of 90° with respect to one another
but can also be arranged in other configurations.

For the position code to be detectable, the virtual
5   raster must be determined. This can be done by studying
the distance between different markings. The shortest
distance found between two markings must originate from
two adjoining symbols having the value 1 and 3 so that
the markings are located on the same raster line between
10   two raster points. When such a pair of markings has been
detected, the associated raster points can be determined
with knowledge of the distance between the raster points
and the displacement of the markings from the raster
points. Once two raster points have been located, further
15   raster points can be determined by means of measured
distances to other markings and with knowledge of the
relative distance of the raster points.

An embodiment of a device for position determination is
shown schematically in Figure 4. It comprises a casing
20   11, which has the approximate format of a pen. At a short
end of the casing there is an opening 12. The short end
is intended to bear against or be held at a short
distance from the surface on which the position
determination is to be carried out.

25   The casing mainly accommodates an optical part, an
electronic part and a power supply.

The optical part comprises at least one light-emitting
diode 13 for illuminating the surface which is to be
imaged and a light-sensitive area sensor 14, for example
30   a CCD or CMOS sensor, for registering a two-dimensional
image. The device may also contain a lens system.

The power supply for the device is obtained from a
battery 15 which is mounted in a separate compartment in
the casing.

21

The electronic part comprises image-processing means 16 for determining a position on the basis of the image registered by the sensor 14 and, more specifically, a processor unit with a processor which is programmed for
5   reading images from the sensor and carrying out position determination on the basis of these images.

In this embodiment, the device also comprises a pen point 17, with the aid of which it is possible to write normal pigment-based writing on the surface on which the
10   position determination is to be carried out. The pen point 17 can be retracted and extended so that the user can control whether or not it is to be used. In certain applications, the device does not need to have any pen point at all.

15   The device also comprises buttons 18, with the aid of which the device is activated and controlled. It also has a transceiver 19 for wireless transmission, e.g. by means of IR light or radio waves, of information to and from the device. The device can also comprise a display 20 for
20   showing positions or registered information.

Applicant's international patent application WO 98/20446 describes a device for registering text. This device can be used for position determination if it is programmed in a suitable manner. If it is to be used for pigment-based
25   writing, it must also have a pen point.

The device can be divided into different physical casings, a first casing containing components which are necessary for obtaining images of the position-coding pattern and for transferring them to components which are
30   located in a second casing and which carry out the position determination on the basis of the registered image or images.

As mentioned, the position determination is carried out by a processor which thus must have software for locating
35   and decoding the symbols in an image and for determining

22

the positions from the codes thus obtained. On the basis
of the above example, a person skilled in the art can
design software which carries out position determination
on the basis of an image of a part of a position-coding
5   pattern.

Furthermore, a skilled person can design software for
printing the position-coding pattern on the basis of the
above description.

In the above embodiment, the pattern is optically
10   readable and the sensor is thus optical. As mentioned,
the pattern can be based on a parameter other than an
optical parameter. In such a case, naturally, the sensor
must be of a type which can read the parameter in
question.

15   In the above embodiment, the raster is a grid network. It
can also have other forms.

In the embodiment above, it is not the longest possible
cyclic number series which is used. This provides a
certain redundancy which can be used, for example, for
20   checking the turning of the read group of symbols.

Figures 5a-5d show four examples of symbols with markings
which contain further binary-coded information at a
number of spatial resolution levels.

Figure 5a shows a marking 51 which, for example, can be
25   one of the markings in one of the above examples. The
marking 51 is of rectangular form and can be read at a
first spatial resolution level. A further marking pattern
52, readable at a second spatial resolution level,
constitutes a part of the marking 51 and with a binary
30   interpretation, this further pattern 52 has, for example,
the binary value "10101".

Figure 5b shows, analogously to Figure 5a, a marking 53
at a first spatial resolution level and a further marking
pattern 54 which is readable at a second spatial

23

resolution level, the binary value of which is
"10100101010001".

Figure 5c shows, analogously to Figures 5a and 5b, a
marking 55 at a first spatial resolution level and two

5   further marking patterns 56 and 57, which are readable at
a second spatial resolution level and the binary values
of which are "10101" and "10101", respectively.

Figure 5d shows, analogously to Figures 5a-5c, a marking
58 at a first spatial resolution level and two further

10   marking patterns 59 and 60, which are readable at a
second spatial resolution level and the binary value of
which are "10101" and, respectively, readable at a third
spatial resolution level and the binary value of which is
"101010010101".

24

CLAIMS

1. A product which has a surface (2) which is provided
with a coding pattern (3) which comprises symbols (4)
representing at least two different values,
5   characterised in that each symbol comprises a raster
point (5) and at least one marking (6); the raster point
is included in a raster which extends over the surface;
the value of each symbol is indicated by the location of
the said marking in relation to a raster point; and at
10   least one marking comprises marking information.

2. A product according to claim 1, wherein essentially
all markings (6) in the coding pattern at a first spatial
resolution level are essentially identical, and in which
at least one marking in the coding pattern at at least a
15   second spatial resolution level, higher than the first
spatial resolution level, exhibits a variation in the
configuration in relation to the marking information.

3. A product according to claim 1 or 2, wherein the
coding pattern is a position-coding pattern which codes a
20   plurality of positions on the surface, each position
being coded by a plurality of symbols.

4. A product according to claim 3, wherein each symbol
(4) contributes to the coding of more than one of said
plurality of positions.

25   5. A product according to claim 3 or 4, wherein each
symbol (4) contributes to the coding of both a first and
a second position coordinate.

6. A product according to claim 5, wherein the value of
each symbol is translatable into at least a first digit
30   which is used for coding the first position coordinate
and at least a second digit which is used for coding the
second position coordinate, the symbols in the position-
coding pattern together representing a first position
code for the first position coordinate and a second
35   position code for the second position coordinate.

25

7. A product according to any one of claims 3-6, wherein the position-coding pattern (3) is based on a first cyclic number series which has the characteristic that no sequence with a first predetermined number of digits

5   occurs more than once in the number series.

8. A product according to claim 4, wherein the first coordinate is coded by a first cyclic number series which has the characteristic that no sequence with a first predetermined number of digits occurs more than once in

10   the number series, being repeated in columns over the surface, the columns beginning at different locations in the number series.

9. A product according to claim 8, wherein the second coordinate is coded by a second cyclic number series

15   which has the characteristic that no sequence with a second predetermined number of digits occurs more than once in the number series, being repeated in rows over the surface, the rows beginning at different locations in the number series.

20   10. A product according to claim 9, wherein the product (1) comprises a plurality of writing surfaces, each of which comprises the position-coding pattern, the position-coding patterns differing for the different writing surfaces by the sequence in the cyclic number

25   series with which a predetermined column or row begins.

11. A product according to any one of the preceding claims, wherein the said raster and said raster point are virtual ones.

12. A product according to one of the preceding claims,

30   wherein each symbol has precisely one marking which can be placed in one of four predetermined positions on the lines of the raster so that the symbol has precisely four values.

26

13. A product according to any one of the preceding claims, wherein the marking information is coded in the form of a pattern varying in a binary manner.

14. A product according to any one of the preceding
5   claims, wherein the coding pattern is optically read.

15. A computer program which is stored on a storage medium which can be read by a computer and which comprises instructions for causing a computer to decode the position-coding pattern on a product according to any
10   one of claims 1-14.

16. A computer program for determining the position of a partial surface on a surface, which is provided with a position-coding pattern which comprises a plurality of symbols, on the basis of an image of the partial surface,
15   wherein each symbol comprises a raster point and at least one marking, which computer program is stored on a storage medium which can be read by a computer and which comprises instructions for causing the computer to:

- locate a predetermined plurality of symbols in the
20   image;

- determine the value of each of said predetermined plurality of symbols;

- separate the position-coding pattern in the image into a first position code for a first coordinate of the
25   partial surface and a second position code for a second coordinate of the partial surface by translating the value of each symbol into at least a first digit for the first position code and at least a second digit for the second position code;

30   - calculate the first coordinate with the aid of the first position code and the second coordinate with the aid of the second position code;

- calculate the value of each symbol by determining the location of each marking in relation to the raster point;

27

- locate at least one marking which comprises marking
information; and

- interpret the marking information.

17. A device for position determination comprising a
5 sensor (14) for producing an image of a partial surface
on a surface and image-processing means (16) which are
arranged to decode a position-coding pattern on a product
according to any one of claims 1-14, said surface being a
surface on the product, which surface is provided with
10 the position-coding pattern.

18. A device for position determination comprising a
sensor (14) for producing an image of a partial surface
of a plurality of partial surfaces on a surface, which is
provided with a position-coding pattern, and image-
15 processing means (16) which are arranged to:

- locate a predetermined plurality of symbols in the
image, where each symbol comprises at least one marking;

- determine the value of each of said predetermined
plurality of symbols;

20 - separate the position-coding pattern in the image into
a first position code for a first coordinate for the
partial surface and into a second position code for a
second coordinate for the partial surface by translating
the value of each symbol into at least a first digit for
25 the first position code and at least a second digit for
the second position code;

- calculate the first coordinate with the aid of the
first position code and the second coordinate with the
aid of the second position code;

30 - locate at least one marking which comprises marking
information; and

- interpret the marking information.

19. A device according to claim 18, wherein the device is
handheld.

20. A device according to claim 18 or 19, wherein the device has means (19) for wireless transmission of position information and marking information.
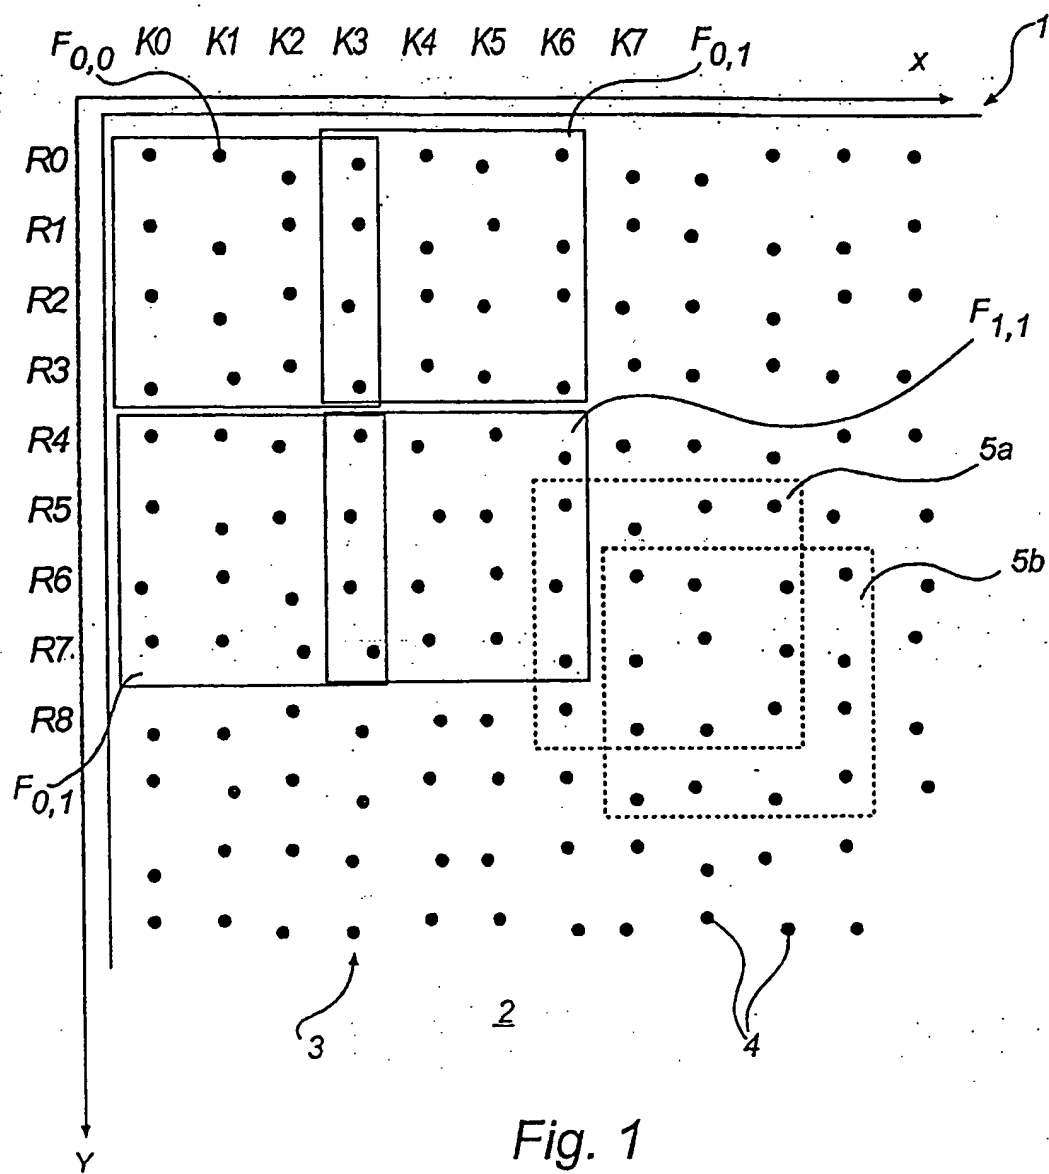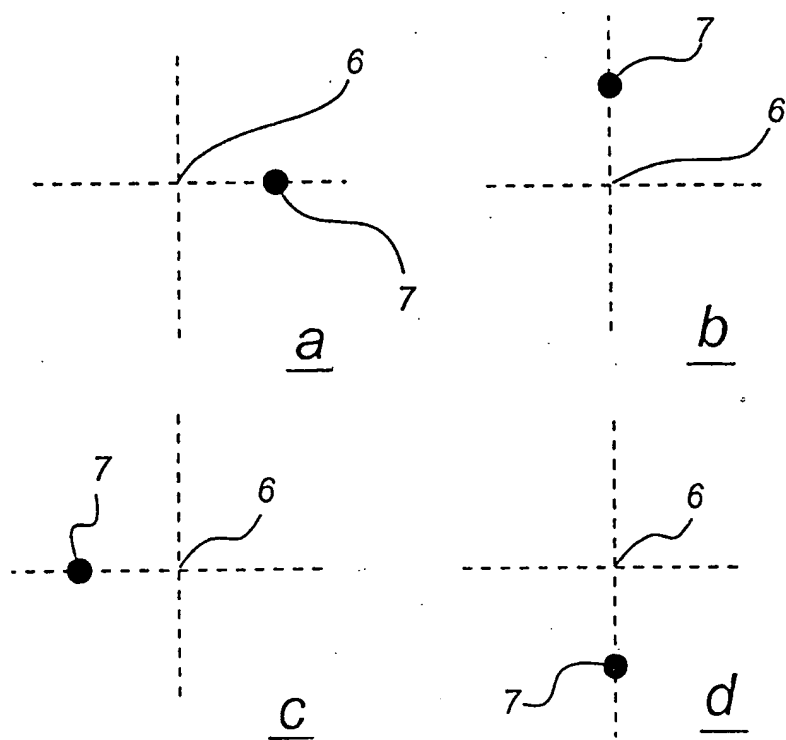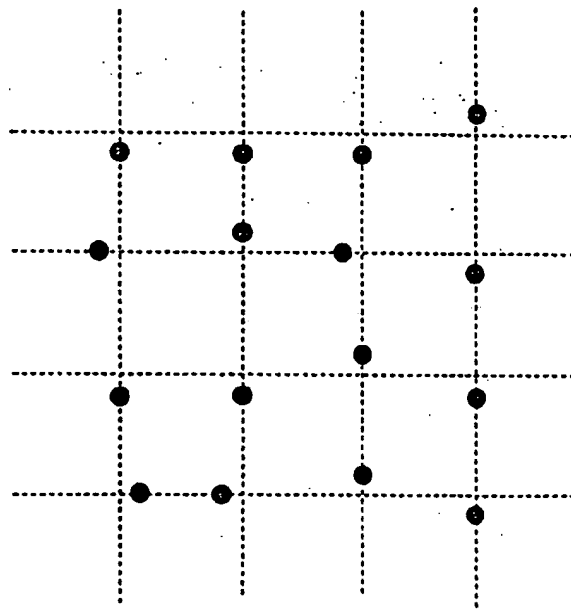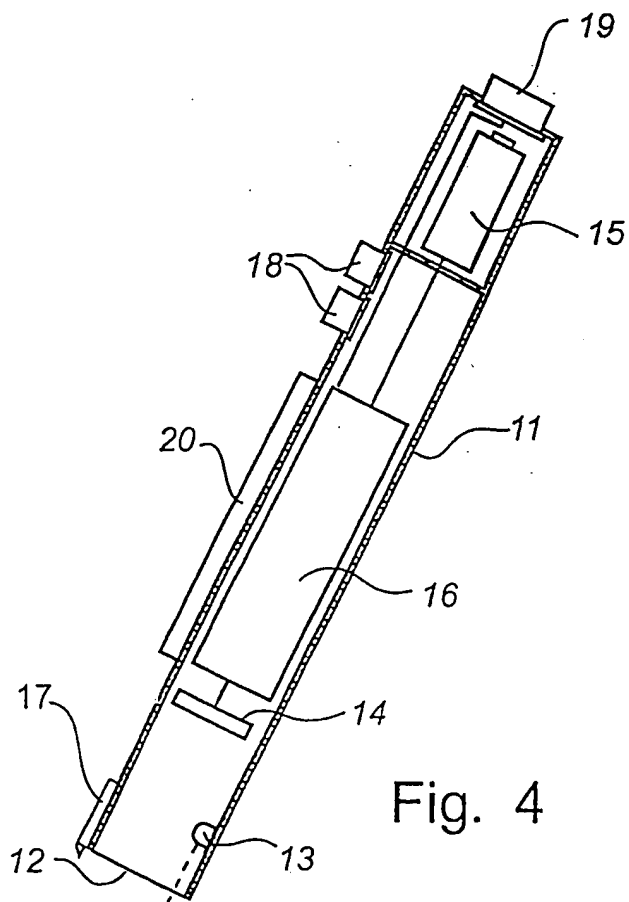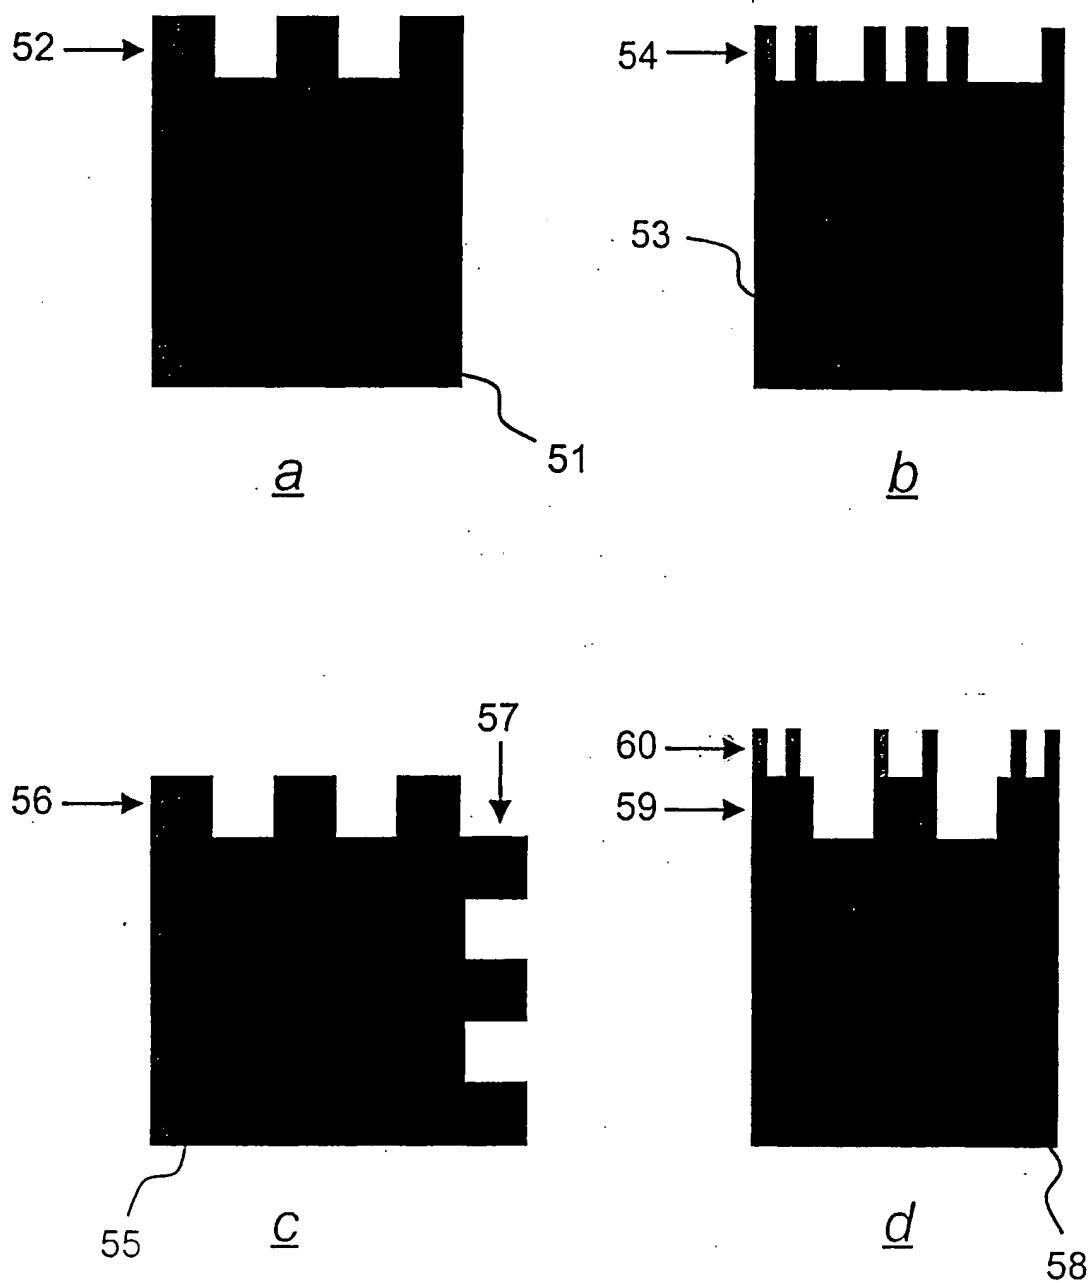
Fig. 1

Fig. 2

Fig. 3

Fig. 4

Fig. 5

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 01/00608

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: G06K 1/12, G06K 11/18, G06F 3/033

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: G06F, G06K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI-DATA, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0171284 A2 (NEC CORPORATION), 12 February 1986 (12.02.86), page 1, line 1 - line 3; page 7, line 14 - page 8, line 2; page 10, line 18 - page 11, line 4, page 14, line 22 - page 15, line6; claims 26 - 28, abstract	1,3-9,11, 13-20
	--	
X	US 5416312 A (J.LAMOUR), 16 May 1995 (16.05.95), column 2, line 15 - column 3, line 3, figures 1-6, abstract	1,15-20
	--	
A	US 5852434 A (O.SEKENDUR), 22 December 1998 (22.12.98), column 2, line 40 - column 4, line 24, figures 1-7, abstract	1-20
	--	

X	Further documents are listed in the continuation of Box C.		X	See patent family annex.

Date of the actual completion of the international search	Date of mailing of the international search report
23 May 2001	19 -06- 2001
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86	Authorized officer Pär Heimdal/LR Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE 01/00608

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5329107 A (D.PRIDDY ET AL), 12 July 1994 (12.07.94), column 2, line 1 - column 3, line 2, figures 1-4 --	1-20
A	US 5221833 A (D.HECHT), 22 June 1993 (22.06.93), column 2, line 27 - line 40, abstract -- --------	1-20

INTERNATIONAL SEARCH REPORT

Box I	Observations where certain claims were found unsearchable (Continuation of Item 1 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☒ Claims Nos.: 15
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

claim 15 is not considered clear and concise in the meaning of Article 6 PCT. The definition of the matter for which protection is sought shall be in terms of the technical features of the invention, see Rule 6.3(a) PCT.

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II	Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.

2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.

3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest
☐ The additional search fees were accompanied by the applicant's protest.
☐ No protest accompanied the payment of additional search fees.

Form PCT/ISA/210 (continuation of first sheet (1)) (July 1998)

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
EP	0171284 A2	12/02/86	AU	592762 B	25/01/90
			AU	4583185 A	13/02/86
			CA	1297553 A	17/03/92
			DE	3580720 D	00/00/00
			JP	1596559 C	27/12/90
			JP	2018722 B	26/04/90
			JP	61043328 A	01/03/86
			US	4803737 A	07/02/89
US	5416312 A	16/05/95	DE	69404563 D	00/00/00
			EP	0627720 A,B	07/12/94
			FR	2705480 A,B	25/11/94
			JP	7098751 A	11/04/95
US	5852434 A	22/12/98	AU	4529896 A	14/07/97
			US	5477012 A	19/12/95
			WO	9722959 A	26/06/97

Patent document cited in search report			Publication date	Patent family member(s)			Publication date
US	5329107	A	12/07/94	AU	622173	B	02/04/92
				AU	3399189	A	09/11/89
				BE	1002654	A	23/04/91
				CH	679084	A	13/12/91
				DE	3914440	A	23/11/89
				DK	218489	A	06/11/89
				ES	2017022	A	16/12/90
				FI	99056	B,C	13/06/97
				FI	892146	A	06/11/89
				FR	2631182	A,B	10/11/89
				FR	2662527	A,B	29/11/91
				GB	2218240	A,B	08/11/89
				GB	8910214	D	00/00/00
				GB	9111614	D	00/00/00
				GR	89100297	A	12/03/90
				IE	62337	B,L	25/01/95
				IL	90140	A	06/09/92
				IT	1231365	B	02/12/91
				IT	8947911	D	00/00/00
				JP	2012579	A	17/01/90
				JP	2622235	B	18/06/97
				JP	2931209	B	09/08/99
				JP	2935640	B	16/08/99
				JP	2951965	B	20/09/99
				JP	7152885	A	16/06/95
				JP	7168902	A	04/07/95
				JP	7175883	A	14/07/95
				KR	9312137	B	24/12/93
				MX	167333	B	15/03/93
				NL	193505	B,C	02/08/99
				NL	8901129	A	01/12/89
				NO	180810	B,C	24/03/97
				NO	891834	D	00/00/00
				NZ	228997	A	25/02/92
				PT	90469	A,B	30/11/89
				SE	506353	C	08/12/97
				SE	8901602	A	06/11/89
				US	4939354	A	03/07/90
				US	5053609	A	01/10/91
				US	5124536	A	23/06/92
				US	5126542	A	30/06/92
				US	5324923	A	28/06/94
				US	5464974	A	07/11/95
				US	5468953	A	21/11/95
				US	5473151	A	05/12/95
				US	5477045	A	19/12/95
				US	5479004	A	26/12/95
				US	5484999	A	16/01/96
				ZA	8903288	A	31/01/90
US	5221833	A	22/06/93	JP	6020078	A	28/01/94